





Instructions / Anweisungen / Vejledning / Bruksanvisning / Anvisningar / Ohjeet


A

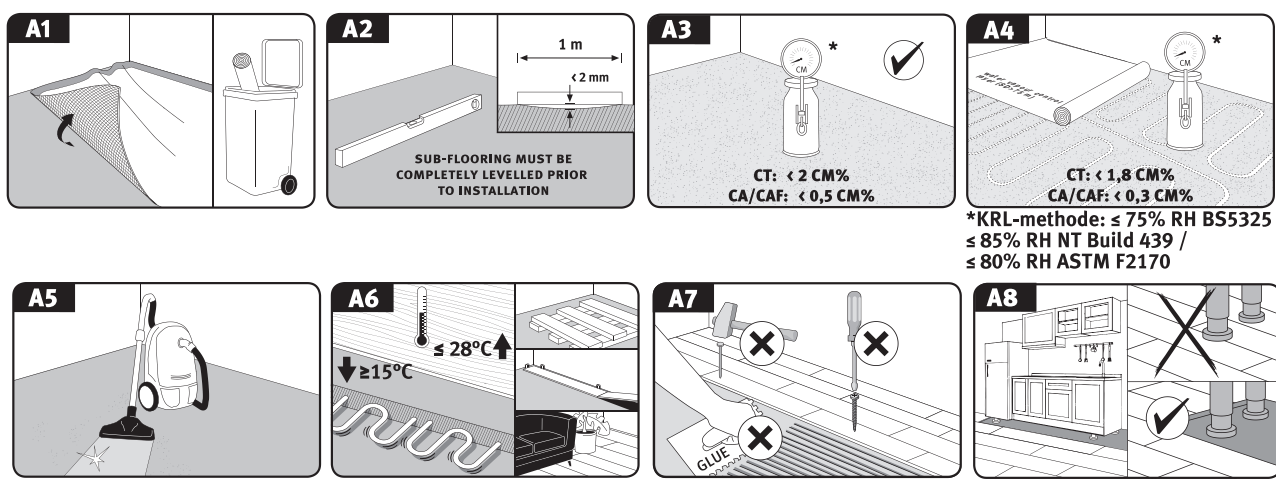


*KRL-methode: ≤ 75% RH BS5325 /
≤ 85% RH NT Build 439 /
≤ 80% RH ASTM F2170

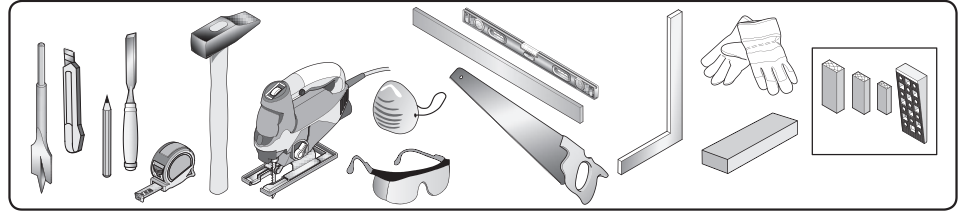


B

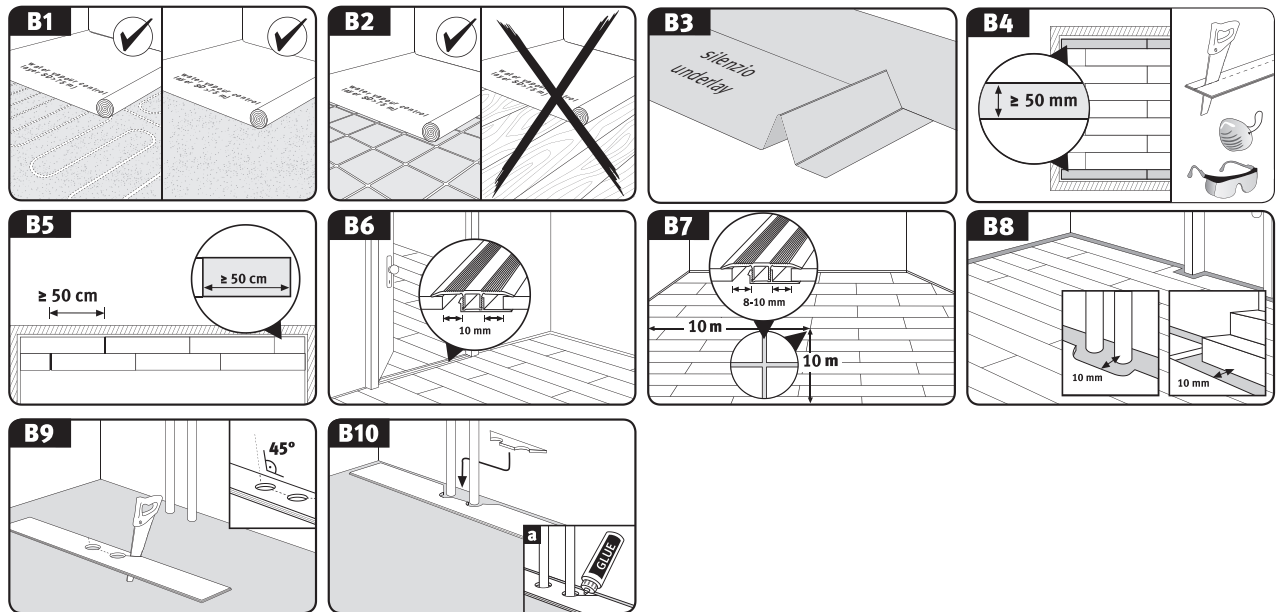


Option A

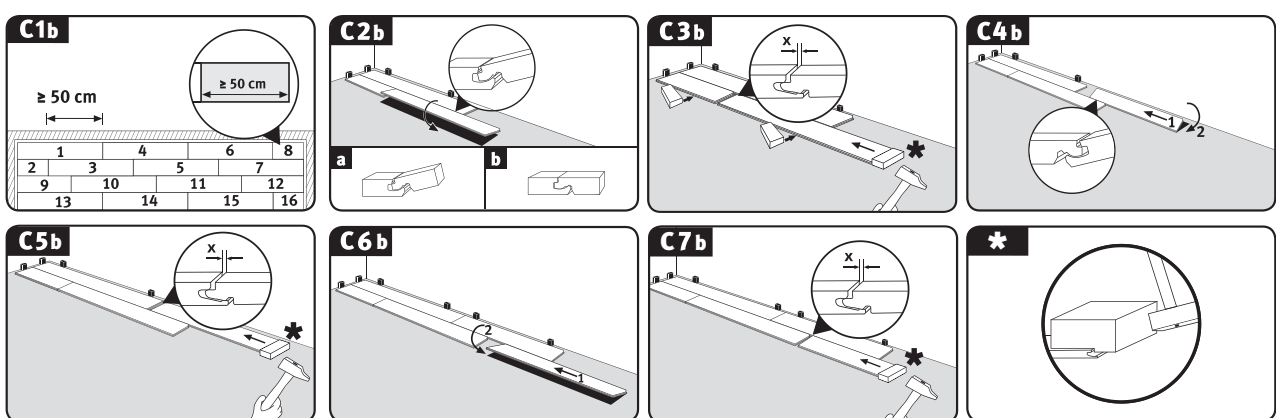

Option B

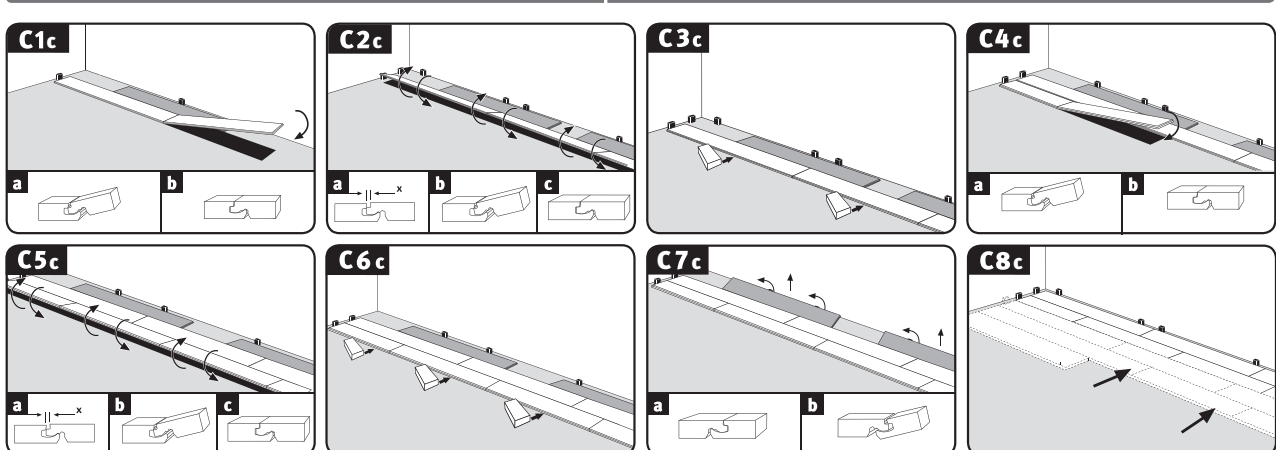

D

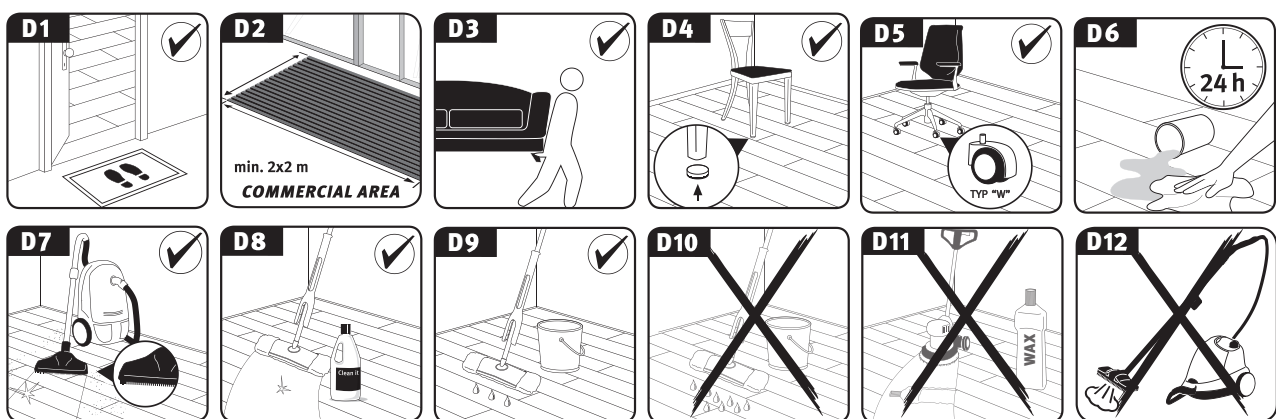

Notices of provisional status
Subject to technical modifications and printing errors.